

THE NEW EIGHT


FOLDING AND UN-FOLDING MANUAL

(SIMILAR FOR NEW TABLE INSTALLATION)




The New Eight is shipped with flat packaging with plastic wrap for scratch protection during shipment. All necessary hardwares are installed and adjusted by our factory.

Prior installation, find a smooth flat surface such as counter top to lay down the product.

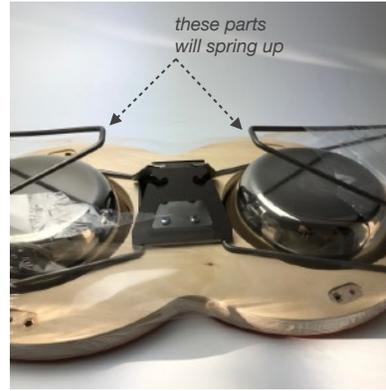

Step 1

While the product is on its clear packaging, turn the whole product upside down as shown on the photo. Carefully, break the plastic wrapping. Leave the packaging on the bottom of product to prevent scratches to the acrylic finish. It is normal (and intentional) to have the wire legs spring-up.

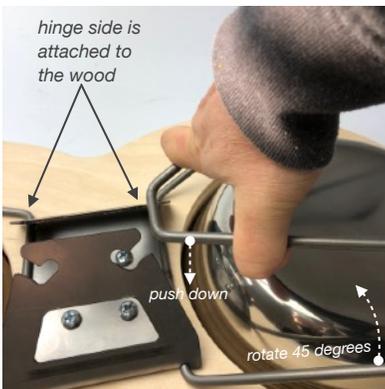

Step 2

Rotate the Leg far side by it's hinge around 45 degrees, hold steady by one hand. While on the rotation, use your both hands to squeeze down the end of the leg to its connector. Release the pressure, The leg should snug-in perfectly.



The leg position after placement should fit snugly on the connector.



Step 3

Repeat the other side with similar way. Turn upside the product and place the stainless bowls on its opening. That's all.




Thank you for your purchase !! Hope you enjoy our product as we do. If you like the product, please feel free to leave us a feedback!

Any suggestions for product improvement or just want to drop a line, please email me at ejtanu@dripmodule.com

THE NEW EIGHT


FIXING THE WOBBLY OR UN-EVEN FLOOR - TROUBLESHOOTING (SIMILAR FOR NEW TABLE INSTALLATION)

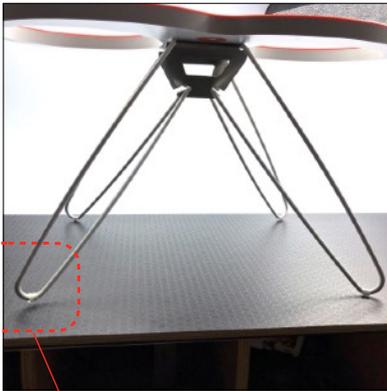

Prior installation, find a **smooth flat surface** such as counter top to lay down the product. This to make sure that the surface of the floor is not the problem.

At our factory, every the new Eight is adjusted to make sure that all the feet are perfectly set on the flat surface, but sometimes due to vibration during shipping, the setting might changed.

If you find that this is the case, there is a simple adjustment that you can do to troubleshoot the wobbly installation such as this sample troubleshooting.

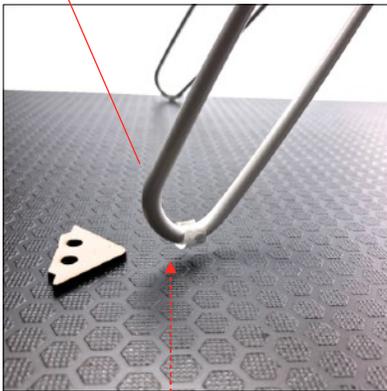

these leg part is not on the floor


Step 1

Find the foot the has the problem sitting on the floor correctly.



Step 2

Follow the leg to the top. Mark this side of the leg to be adjusted.

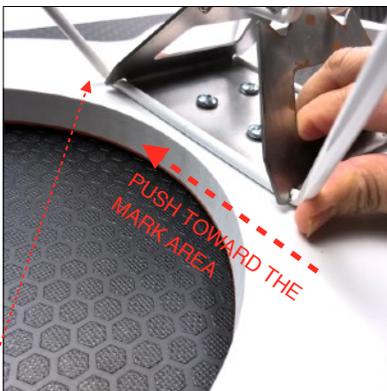

Step 3

Turn the whole product upside down as shown on the photo. To prevent scratches to the acrylic finish, put towel on the surface prior flipping it.

Carefully, push gently to the **opposite side** toward the leg part that has the problem.



Step 4

Flip the whole unit to the correct position, this should correct the problem.

If the problem still persist, follow the instruction for the other set of the leg. in many cases, you don't need to have this step.

this side of leg part is not on the floor (mark on step 2)